Machine Translated by Google

RELOCATE STORAGE DRAWER

1. Retirez toutes les cassettes et tiroirs.

   un. Retirez tous les tiroirs patient du chariot en saisissant la poignée en haut de chacun. cassette et en la tirant tout droit.

   b. Retirez tous les tiroirs de rangement en tirant le tiroir, puis localisez le levier de déverrouillage sur chaque côté de la glissière du tiroir. Appuyez sur un côté et tirez sur le côté opposé du levier de déverrouillage. Tirez légèrement et retirez le tiroir de la glissière. Mettez les tiroirs de côté en notant leur position afin qu'ils puissent être remis au même endroit.

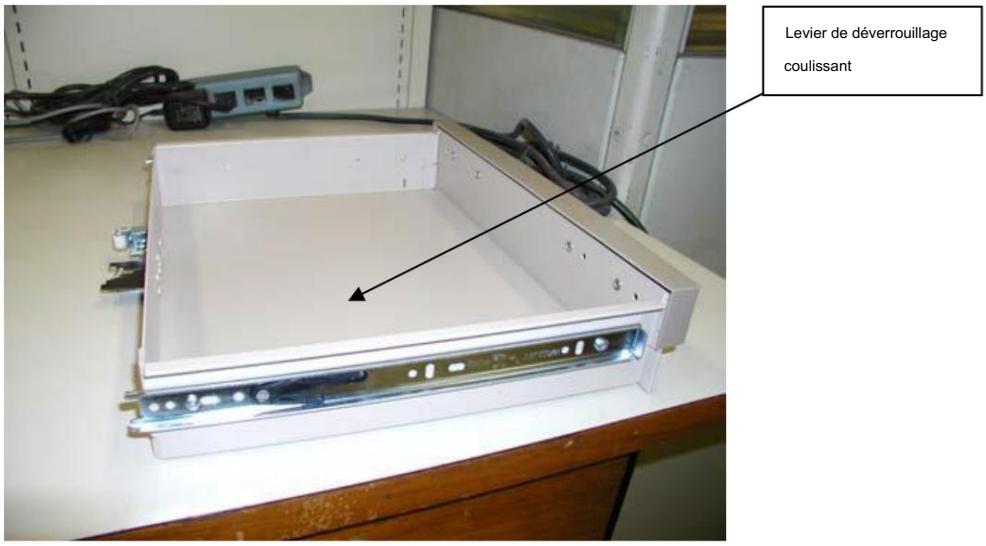

   c. Retirez l'étagère qui se trouve au-dessus du tiroir de rangement inférieur. Cette étagère n'est plus utilisée et peut-être jeté.

Machine Translated by Google

d. Détachez quatre chariots 8-32 x ¼. " vis à métaux qui maintiennent les glissières de la paroi intérieure du

e. Déplacez ces diapositives en position supérieure et fixez-les à l'aide du matériel qui a été retiré. l'étape précédente.

2. Déplacez le loquet à l'arrière du tiroir de rangement vers l'ensemble inférieur de trous de montage.

un. Retirez les vis de montage et déplacez la poignée du tiroir dans sa position de montage supérieure.

3. Installez la rampe de détente

un. Installez les inserts filetés dans les trous sur la position supérieure du mur gauche pour la rampe de détente à l'aide outil de compression fourni.

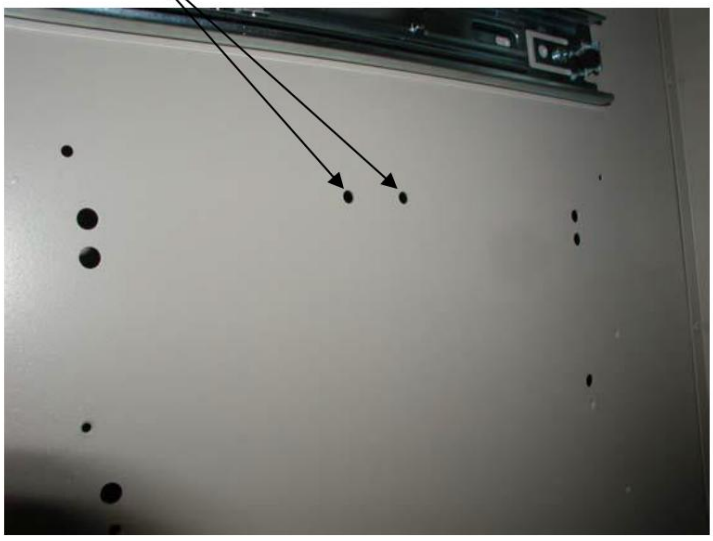

Machine Translated by Google

b. Installez la rampe de détente en toute sécurité avec des vis à métaux 6-32 x 5/8".

4. Installez le tiroir de rangement en position supérieure.

5. Verrouillez le chariot.

un. Assurez-vous que le tiroir supérieur est sécurisé lorsque le chariot est verrouillé.

Machine Translated by Google

We put space to work.

© 2023 InterMetro Industries Corporation, Wilkes-Barre, PA 18705
INSTR-DRWRCHNG RÉV 06/23

an Ali Group Company

The Spirit of Excellence

RELOCATE STORAGE DRAWER

1. *Remove all cassettes and drawers.*

   a. *Remove any Patient drawers from the cart by grasping the handle at the top of each cassette and pulling straight out.*

   b. *Remove any storage drawers by pulling the drawer out then locate the release lever on each side of the drawer slide. Push down on one side and pull up on the opposite side of the release lever. Pull with a slight tug and remove the drawer from the slide. Set drawers aside noting their positions so that they may be returned to the same location.*

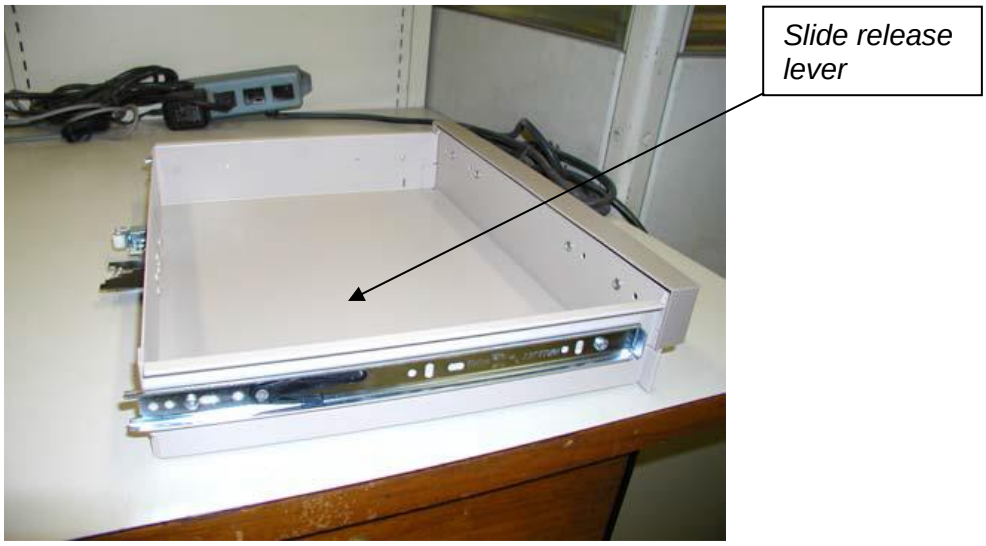

   c. *Remove the shelf that is above the lower storage drawer. This shelf is no longer used and maybe discarded.*

d. *Unfasten four 8-32 x ¼ " machine screws that hold the slides from the inner wall of the cart.*

e. *Relocate these slides to the top position and reattach with hardware that was removed on the previous step.*

2. *Relocate the catch on the back of the storage drawer to the lower set of mounting holes.*

   a. *Remove mounting screws and relocate handle on the drawer to its upper mounting position.*

3. *Install Detent Ramp*

   a. *Install threaded inserts into holes on left wall top position for detent ramp using compression tool provided.*

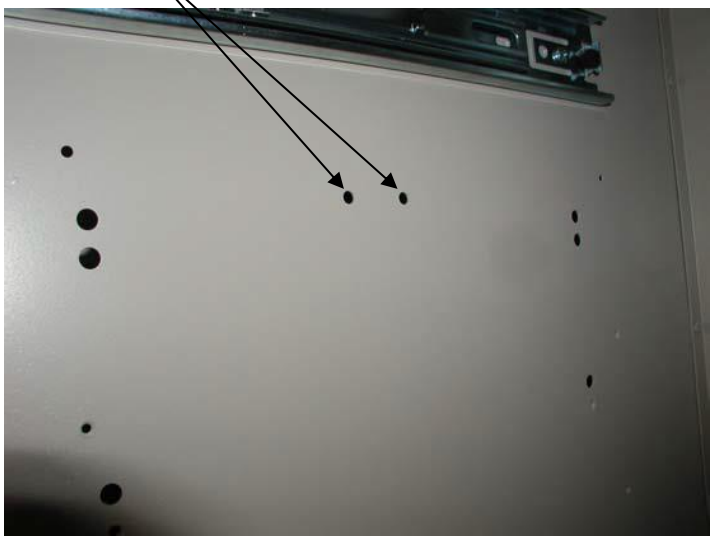

b. Install detent ramp secure with 6-32 x 5/8" machine screws.

4. Install storage drawer in top position.

5. Lock cart.

a. Make sure top drawer is secure when cart is locked.

We put space to work.

© 2023 InterMetro Industries Corporation, Wilkes-Barre, PA 18705
INSTR-DRWRCHNG REV 06/23

an Ali Group Company

GROUP

The Spirit of Excellence