



INSTRUCTIONS FOR USE

qwikSLOT™ Shelves

qwikSLOT™ Drop Mat Shelves

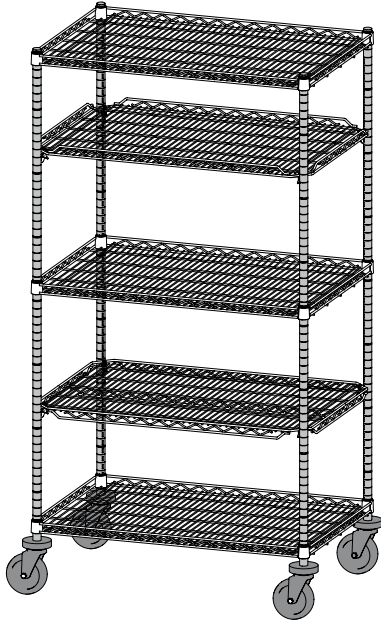

Mobile Unit

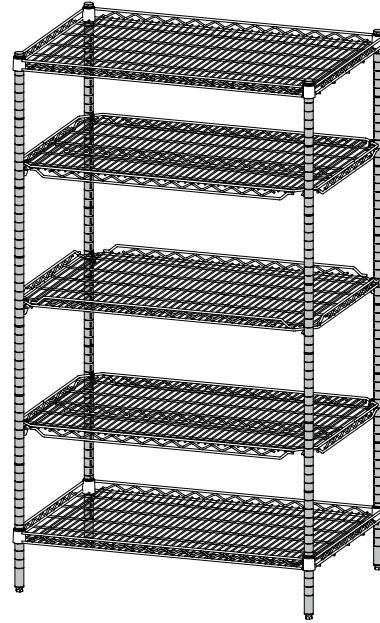

Stationary Unit

Super Erecta qwikSLOT Shelves Stability Guidelines / Allowable Height

Stationary Units (free-standing without footplates or wall brackets)

Shelf Depth	Maximum Allowable Post Height*
14" (356mm)	63" (1600mm)
18" (457mm)	86" (2184mm)
21" (533mm)	86" (2184mm)
24" (610mm)	96" (2438mm)

*For all stationary units with footplates or wall brackets properly attached to the floor or wall, the maximum allowable post height is 96" (2438mm). Stationary units over 96" (2438mm) high are considered Hi-Rise applications and must be submitted to InterMetro engineering for review prior to approval. Consult your Metro representative for details.

Mobile Units with stem casters

Shelf Depth	Maximum Allowable Post Height
14" (356mm)	54" (1372mm)
18" (457mm)	74" (1880mm)
21" (533mm)	74" (1880mm)
24" (610mm)	86" (2184mm)


Weight Capacity (Evenly Distributed)

Super Erecta qwikSLOT Drop Mat	250 lbs. (113 kg)
qwikSLOT Shelves	300 lbs. (136 kg)

FOR BEST PERFORMANCE...

Units over 50" (127cm) high must be assembled with at least three shelves, and preferably four or more.
Place shelving on solid and level floors.
Level the unit by adjusting the leveling feet.
Install bottom shelf as low as possible. NSF requires that the lowest shelf be at least 6" (152mm) above the floor.
For mobile units: lubricate the casters regularly and replace worn casters immediately.

⚠ WARNING - TIPPING HAZARD

- ▶ Do not stand or climb on shelving.
- ▶ Place heavy objects on lowest shelf.
- ▶ Distribute weight as evenly as possible.
- ▶ Do not drop heavy objects on shelves or subject units to shock such as forklifts or dollies.
- ▶ Move mobile units along long axis only ().
- ▶ 8" (203mm) diameter casters must not be used on units less than 21" (533mm) wide.
- ▶ Strictly follow weight capacity guidelines below.
- ▶ NEVER exceed 800 lbs. (363 kg) on any Storage System

Failure to follow these instructions could result in personal injury or property damage.

DESCRIPTION

qwikSLOT™ Shelves / qwikSLOT™ Drop Mat Shelves – This instruction sheet covers installation of SES Shelves to Post.



IDENTIFY

SES DROP MAT SHELVES (★)




QWIKSLOT SHELVES (●)







QWIKSLOT DROP MAT SHELVES (◆)

QWIKSLOT POSTS (◆)

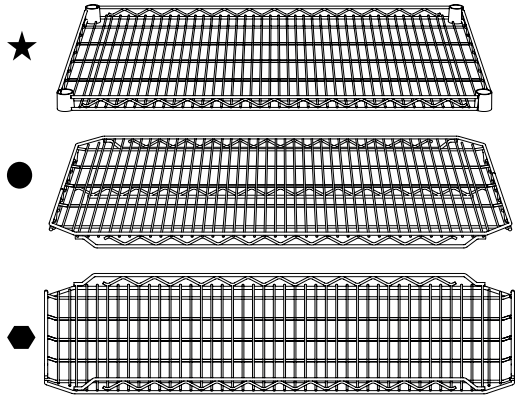

MOBILE UNIT APPLICATION

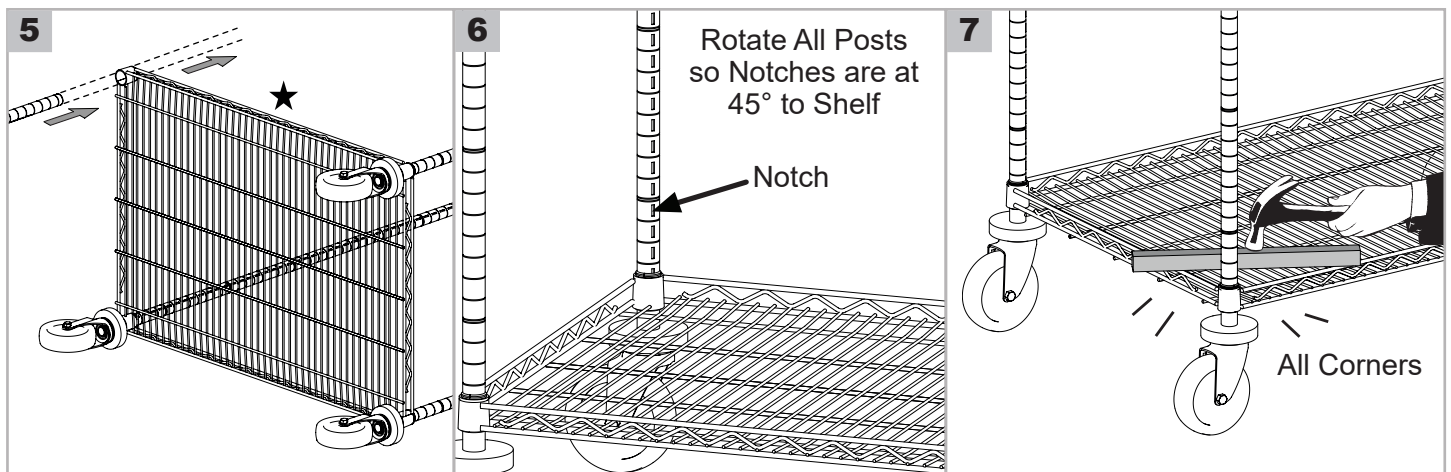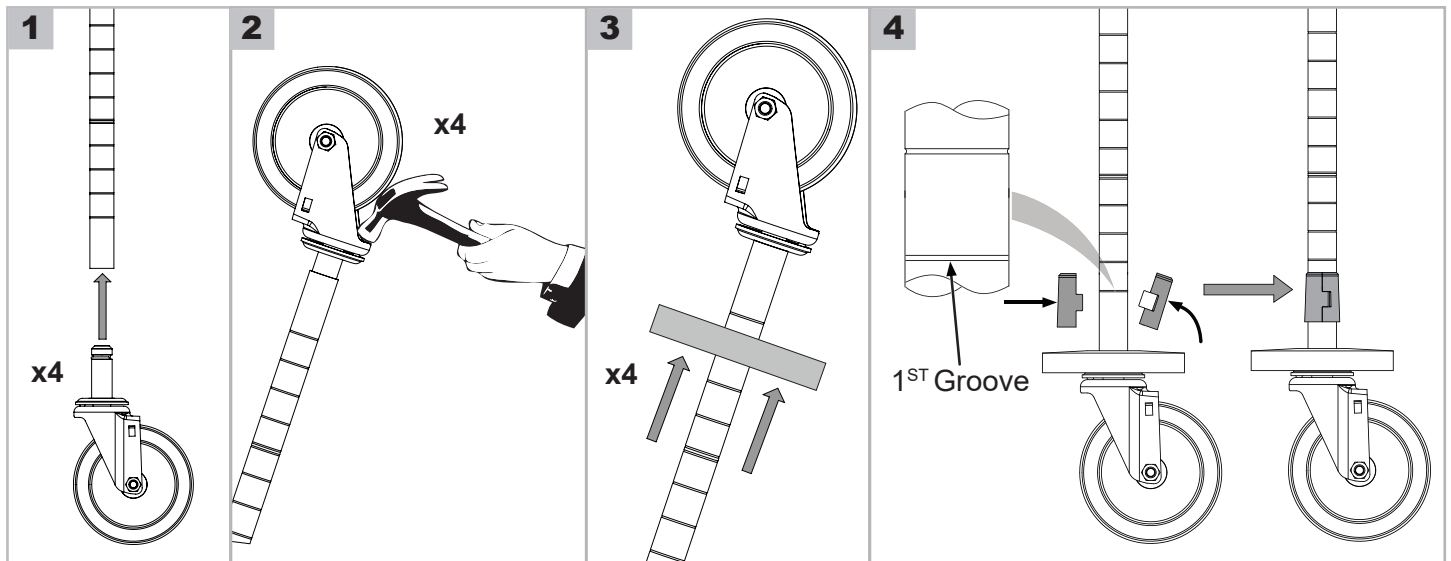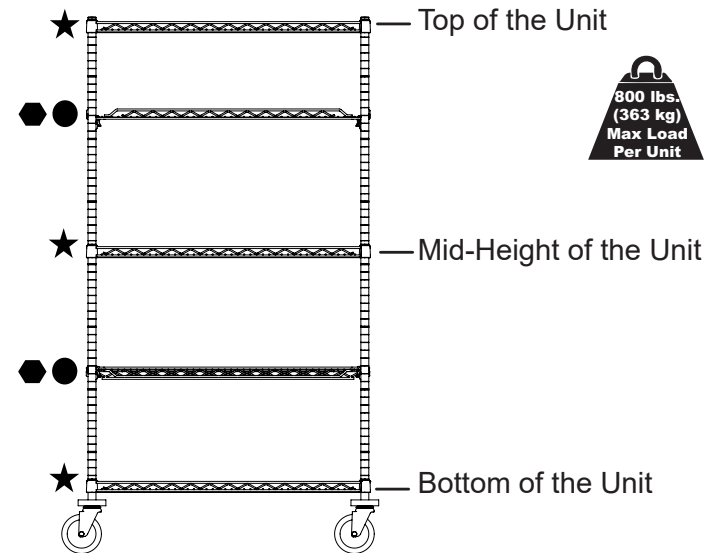

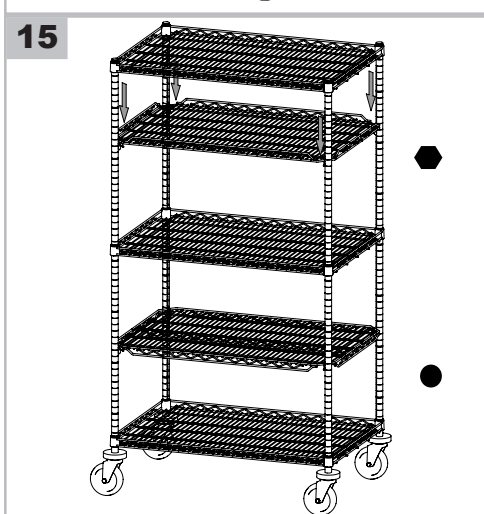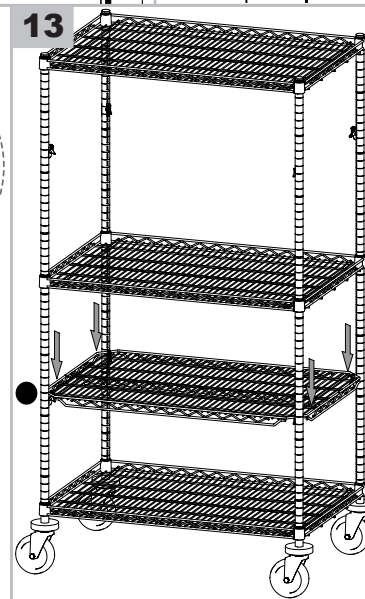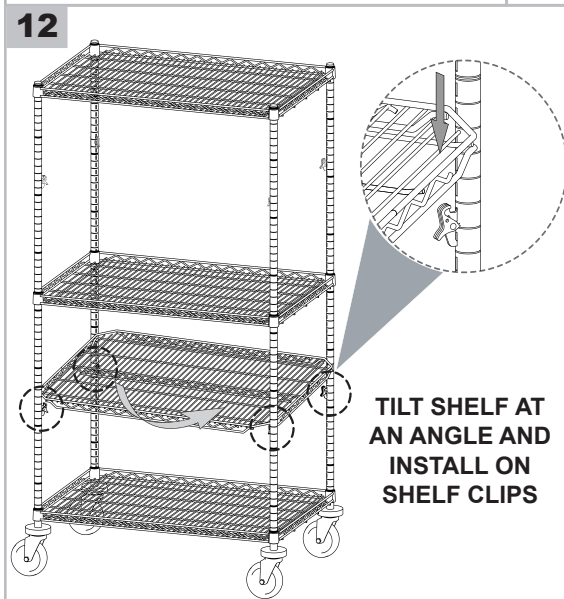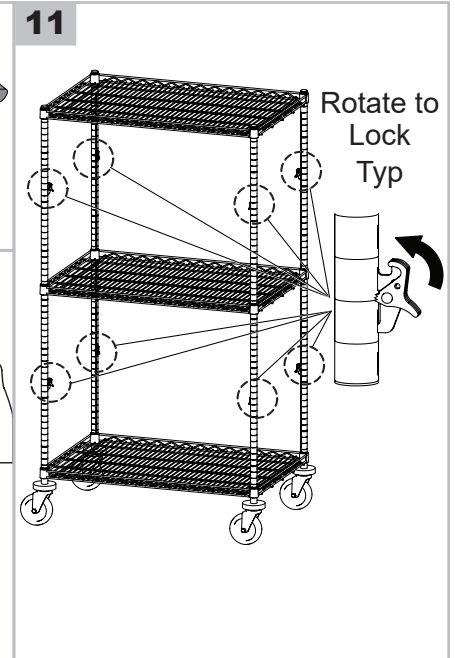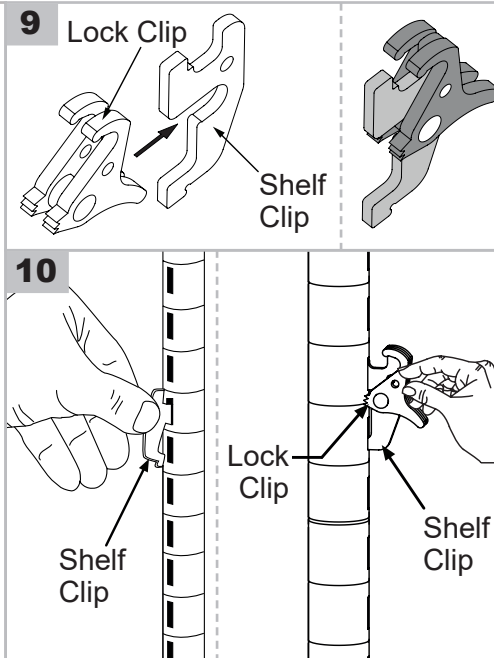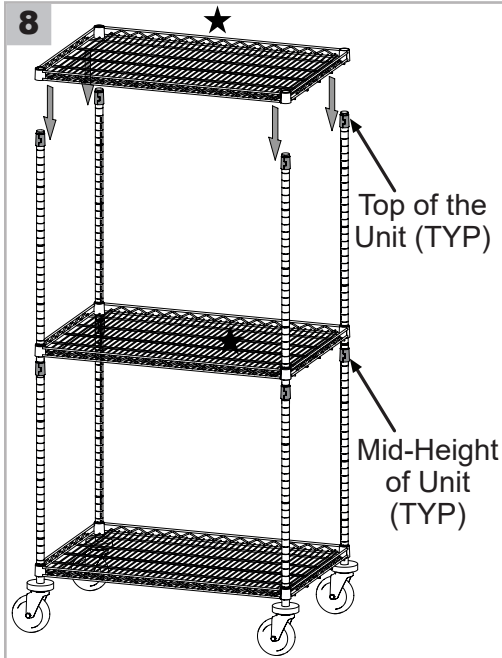

**THIS COMPLETES
THE ASSEMBLY
OF
MOBILE UNIT**

STATIONARY UNIT APPLICATION - STABILITY

★

Top of the Unit

●

●

●

●

●

●

●

●

★

Bottom of the Unit

800 lbs.
(363 kg)
Max Load
Per Unit

1

12

10

6

4

12

10

6

4

x4

Groove #7

2

★

3

All Corners

4

Top of the Unit (TYP)

5

●

●

●

FOLLOW STEPS
9-15 OF PAGE 3
FOR INSTALLING
SHELVES

THIS COMPLETES
THE ASSEMBLY
OF STATIONARY UNIT

TO SLANT A SHELF AT 10° OR 45°

10°

2 -
Grooves
Up

45°

11 -
Grooves
Up

- ANY QwikSLOT shelf can be angled 10° simply by adjusting the rear clips 2" (51 mm) higher than the front clips.
- For a slanted shelf with a 45° slope, simply install a qwikSLOT shelf that is one width-size size larger than the top and bottom Super Erecta collared shelf.
- See chart below.

Top / Bottom Shelf	Intermediate Shelf Flat - 10°	Intermediate Shelf 45°
14"(356 mm)	14"(356 mm)	18"(457 mm)
18"(457 mm)	18"(457 mm)	21"(533 mm)
21"(533 mm)	21"(533 mm)	24"(610 mm)
24"(610 mm)	24"(610 mm)	N/A

* Save this document for future application, load rating and/or safety reference.

We put space to work.

© 2019 InterMetro Industries Corporation, Wilkes-Barre, PA 18705
L01-485 REV B 04/19

an Ali Group Company

ali

GROUP

The Spirit of Excellence